
FC-36 Panel

Info Sheet



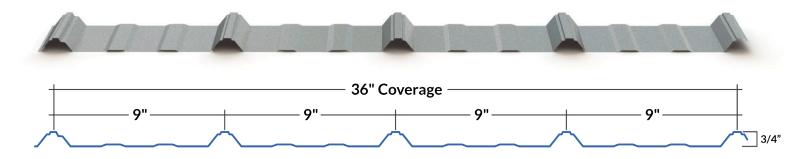

The Strongest & Most Widely Used 3/4" Panel

With a full 3/4" tall rib designed for maximum rigidity, *FC-36* is engineered to strike the ultimate balance between economy and strength. The overlap anti-siphon channel keeps the weather outside, while the 40-year paint guarantee and high-tensile substrate keeps the exterior looking great for years to come.

Originally designed for traditional and agricultural buildings, the **FC-36** panel is extremely durable and designed to stand the test of time in all climates. This most popular profile is also used for residential roofing, modern-industrial accents, and on retail and other commercial building designs.

Applications: Roof & Wall

Coverage: 36" Depth: 3/4"

Available Gauges: 26 & 29

Available in 30+ Standard Colours

Recommended Slope: 2.5/12 with overlap sealant (or 3/12 without)

Note: Confirm with construction standards and underlayment manufacturing

Bell Top Results in Strongest 3/4" Panel

Class 4 Impact Resistance

Cutting charge applies below 48"


Goodbye Hydraulic Effect



Our Anti-Siphon Channel combats water being suctioned uphill between panels. This simple yet smart design will keep your buildings dry and weather tight for years to come.








FC-36 PANEL

Recommended Trims

Our trim codes will depend on your rib height/coverage of choice. Included on this sheet are the most commonly selected trims for this panel but *custom trims are available*. When selecting your trim, please ensure you indicate your gauge & colour of choice.

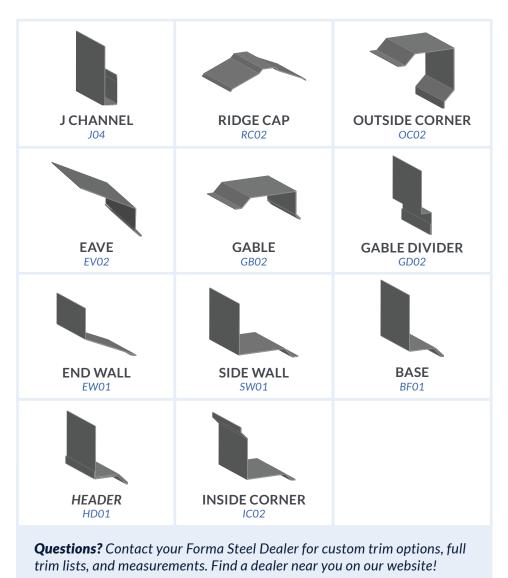



Available in 30+ Standard Colours

To view swatches of your colour options, visit our website!





